
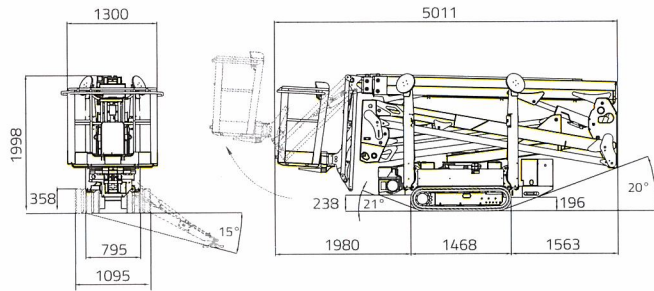


LIGHTLIFT 20.10

PERFORMANCE III S MK2

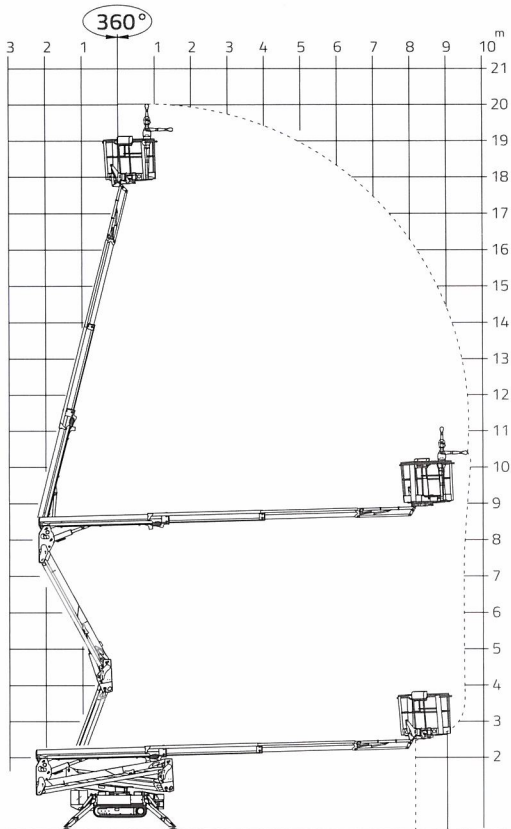

-  20,15 m
-  9,70 m
-  5,01 m
-  4,66 m
-  1,99 m
-  1335x690xh.1100 mm
-  124° (+/-62°)
-  16° / 28,7%
-  2840 kg / 6261 lb (Honda)
2940 kg / 6481 lb (Perkins)
2950 kg / 6503 lb (lithium-ion)
-  Honda IGX440 Automatic rpm control 12,7 CV - 3600rpm
Perkins 402.05 14CV - 3600 rpm

-  2,2kw-230V-50Hz
2,2kw-110V-50Hz
-  0,5-1,3-2,5 Km/h
-  795 - 1095 mm
-  2150 daN - 3,04 daN/cm²
-  2922x2925 mm
-  Stabilisation et destabilisation automatique IIS de série
Standaard kenmerken serie performance IIS
-  Télécommande
Afstandsbediening met kabel
-  GPRS-GPS
-  R.A.H.M.
-  100Ah/72V
Optionnel - Optioneel

