



DONNÉES TECHNIQUES

P 25.6 / P 25.6 L

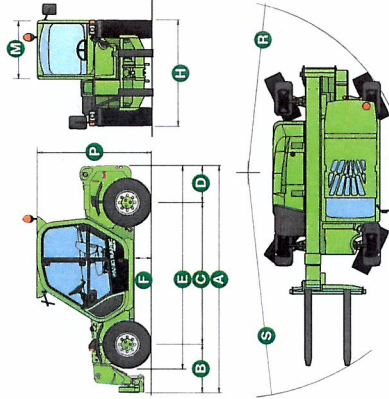


DIMENSIONS		P 25.6		P 25.6 L	
A (mm)	3900	3900	4200	3900	4200
B (mm)	835	835	835	835	835
C (mm)	2450	2450	2450	2450	2450
D (mm)	615	615	615	615	615
E (mm)	3480	3480	3480	3480	3480
F (mm)	270	270	270	270	270
H (mm)	1800	1800	1800	1800	1800
M (mm)	995	995	995	995	995
P (mm)	1920	1920	1770	1770	1770
R (mm)	3370	3370	3370	3370	3370
S (mm)	4200	4200	4200	4200	4200

P 28.8 Plus / L Plus / Top





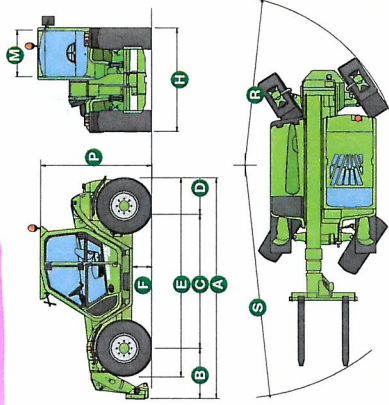


DIMENSIONS		P 28.8 Plus / Top		P 28.8 L Plus	
A (mm)	4260	4260	4260	4260	4260
B (mm)	1000	1000	1000	1000	1000
C (mm)	2720	2720	2720	2720	2720
D (mm)	530	530	530	530	530
E (mm)	3780	3780	3780	3780	3780
F (mm)	385	385	385	385	385
H (mm)	2000	2000	2000	2000	2000
M (mm)	995	995	995	995	995
P (mm)	2150	2150	2000	2000	2000
R (mm)	3700	3700	3700	3700	3700
S (mm)	4550	4550	4550	4550	4550

P 32.6 Plus / L Plus / Top

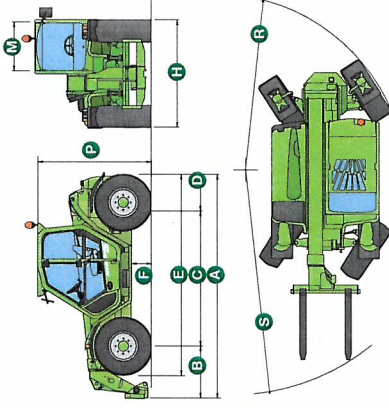

DIMENSIONS		P 32.6 Plus / Top		P 32.6 L Plus	
A (mm)	4220	4220	4220	4220	4220
B (mm)	970	970	970	970	970
C (mm)	2720	2720	2720	2720	2720
D (mm)	530	530	530	530	530
E (mm)	3780	3780	3780	3780	3780
F (mm)	385	385	385	385	385
H (mm)	2000	2000	2000	2000	2000
M (mm)	995	995	995	995	995
P (mm)	2150	2150	2000	2000	2000
R (mm)	3700	3700	3700	3700	3700
S (mm)	4550	4550	4550	4550	4550

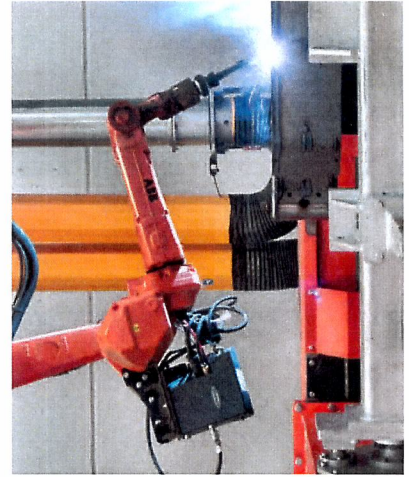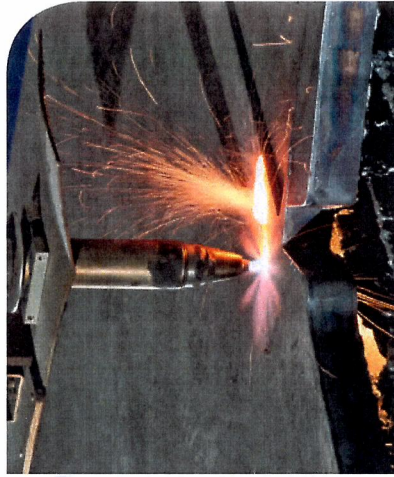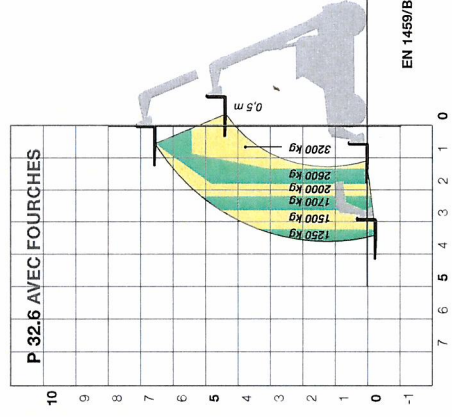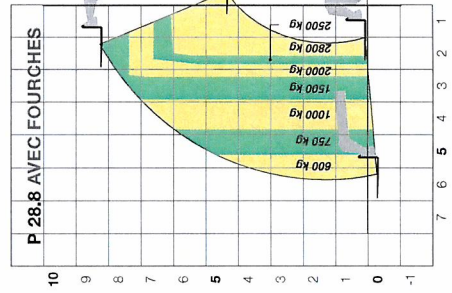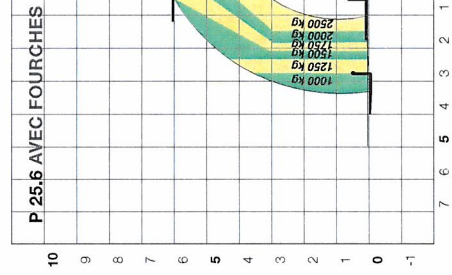

EN 1459/B

EN 1459/B

EN 1459/B